


2023 RAM ProMaster

Gear Selector Override

procedure to temporarily move the gear selector:

1. Turn the engine OFF.
2. Firmly apply the parking brake.
3. Using a small screwdriver or similar tool, remove the shifter boot material of the gear selector by pulling up to carefully separate the gear selector bezel and boot assembly from the console.

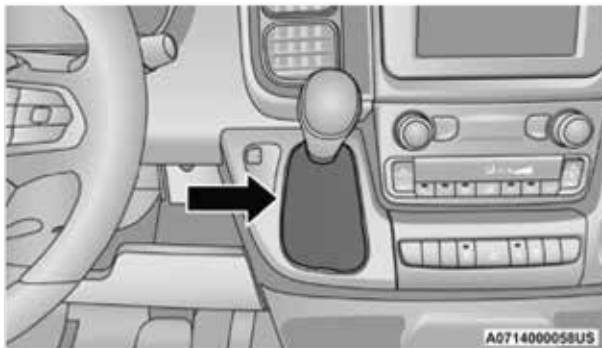

Shifter Boot And Bezel

4. Press and maintain firm pressure on the brake pedal.
5. Insert the screwdriver or similar tool into the gear selector override release and push down while depressing the shifter button at the same time.



Gear Selector Override Release Lever

6. Move the gear selector to the NEUTRAL (N) position.
7. The vehicle may then be started in NEUTRAL.
8. Reinstall the shifter boot and bezel.